

arsen's Cameo Series Fire Extinguisher Cabinets Submittal and Detail Sheet

PROJECT:	LOCATION:
MODEL NUMBER:	QUANTITY:
ARCHITECT:	CONTRACTOR:
DATE:	DISTRIBUTOR:
	SPECIFICATIONS: The Cameo's design allows for the protection of the extinguisher into its protruding bubble and not only permits installation into a shallow wall but also results in full, 180 degree visibility of the extinguisher. The manufacturer's standard bracket, which is included with each fire extinguisher, must be used to support the extinguisher inside the Cameo cabinet. The standard door and trim material is steel, and optional materials include aluminum, stainless steel, solid brass, and solid bronze. All door frames are 1/2 inch thick, hollow-metal design. All units have a satin finish

BOX SPECIFICATION:

All recessed and semi-recessed cabinets and surface-mounted steel cabinets have a heavy gauge, white baked enamel box. Surface-mounted cabinets with aluminum door and trim have a box constructed entirely of clear or color anodized aluminum. Surface-mounted cabinets with stainless steel door and trim have a box constructed entirely of 304 stainless steel with a #4 finish.

pull handle with a self-adjusting roller catch and a continuous piano hinge constructed of material which matches the door and

trim. The Larsen-Loc® is available with all door styles.

TRIM AND DOOR SPECIFICATION:


The standard door and trim material is steel, and optional materials include aluminum, stainless steel, solid brass, and solid bronze. Steel trims and doors are one piece, constructed of heavy gauge, cold-rolled steel with a standard finish of white baked enamel, which can be used as either a finish or prime coat. Aluminum trims and doors are constructed of extruded aluminum with a satin anodized finish. Clear anodized is standard, and a wide selection of optional color anodized finishes is available. All aluminum trim and door corners are mitered. To specify aluminum trim and door, use the prefix "AL" before the cabinet model number. Stainless steel trims and doors are one piece, constructed of heavy gauge #4 finish, 304 stainless steel. Polished stainless steel finishes are available as options, if specified. To specify stainless steel trim and door, use the prefix "SS" before the cabinet model number. Solid brass and Solid bronze trims and doors are one piece, with a standard satin, brushed finish and clear protective coating. Polished brass and bronze finishes are available as options, if specified. To specify solid brass trim and door, use the prefix "B". To specify solid bronze trim and door, use the prefix "BZ".

(SEE ATTACHED SHEET FOR DIMENSIONS & DOOR STYLES)

TOP VIEW



SIDE VIEW



TRIM PROJECTION:

- □ Flat 5/16" ☐ 1 1/4" or 1 1/2" Square ☐ 2 1/2" Rolled Edge
- □ Trimless †
- □ Surface Mounted

TRIM & DOOR MATERIAL:

- □ Steel □ Aluminum (AL)
 - ☐ Bronze (BZ)
- ☐ Stainless (SS) ☐ Brass (B)
- Other (Specify)

† Trimless cabinets must be installed before the drywall because their plaster stops must be behind the drywall.

Trimless cabinets are not recommended for block wall installation.

7421 Commerce Lane N.E., Minneapolis, MN 55432 Phone: (763) 571-1181 FAX: (763) 571-6900


FLORIDA DIVISION: 3130 N.W. 17th Street, Ft. Lauderdale, FL 33311 Phone: (954) 486-3325 FAX: (954) 486-3352

CABINET DIMENSIONS - CAMEO SERIES

Model	Trim Style and	Inside Box Dimensions		Outside Trim Dimensions**		Rough Opening***			Recommended Extinguisher	
Number Projection	Projection	Height	Width	Depth	Height	Width	Height	Width	Depth	Capacity
NON FIRE-RATED C 2409-R C 2409-5R C 2409-6R C 2409-RT C 2409-SM	Rec5/16" Semi-Rec. 1-1/2" Semi-Rec. 2-1/2" Trimless Surface Mounted	24" 24" 24" 24" 27½"	9½" 9½" 9½" 9½" 13"	3½" 3½" 3½" 3½" 3½"	27½" 27½" 27½" - 27½"	13" 13" 13" - 13"	25" 25" 25" *	10½" 10½" 10½" *	4" 2¾" 1½" 4"	MP 2-1/2,MP5, MP5-A,DC2½, DC5,MP6,MP10, DC6,DC10, HT5,HT2½
FIRE RATED*** FS C2409-R FS C2409-5R FS C2409-6R	Rec. 5/16 Semi-Rec. 1½ Semi-Rec. 2½	24" 24" 24"	9½" 9½" 9½"	3½" 3½" 3½"	27½" 27½" 27½"	13" 13" 13"	26-1/8" 26-1/8" 26-1/8"	11-5/8" 11-5/8" 11-5/8"	4-5/8" 3-7/8" 2-5/8"	
NON FIRE-RATED C 3216-R C 3216-RL C 3216-RT C 3216-SM	Rec5/16" Semi-Rec. 2-½" Trimless Surface Mounted	32" 32" 32" 35½"	16" 16" 16" 19½"	3½" 3½" 3½" 3½"	35½" 35½" - 35½"	19½" 19½" - 19½"	33" 33" *	17" 17" *	4" 1½" 4"* -	All of Above, PW2½,MP20, DC20,CD5,CD10, WC-6L, HT11,HT15½
FIRE RATED*** FS C3216-R FS C3216-RL	Rec. 5/16" Semi-Rec. 2½"	32" 32"	16" 16"	3½" 3½"	35½" 35½"	19½" 19½"	34-1/8" 34-1/8"	18-1/8" 18-1/8"	4-5/8" 2-5/8"	
NON FIRE-RATED C 3228-R C 3228-RT C 3228-SM FIRE RATED***	Rec5/16" Trimless Surface Mounted	32" 32" 35½"	28¾" 28¾" 31½"	3½" 3½" 3½"	35½" - 35½"	31½" - 31½"	33" *	29¾" *	4" 4" -	Two Each of the Listed: PW2-1/2, MP10,DC10,
FS C3228-R	Rec. 5/16"	32"	28¾"	3½"	35½"	31½"	34-1/8"	31"	4-5/8"	CD5,CD10,WC-6L

^{*} Trimless cabinets must be installed before the drywall because their plaster stops must be behind the drywall. Trimless cabinets are not recommended for block wall installation.

NOTE: All recessed (R-5/16") and trimless (RT) Cameo cabinets listed above comply with all ADA wall projection guidelines. Semi-recessed and surface-mounted Cameo cabinets' compliance with ADA wall projection guidelines depends on several location and installation issues. Please refer to www.larsensmfg.com

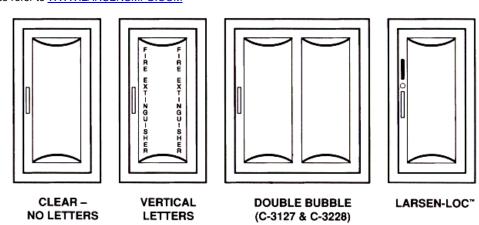

BUBBLE DESIGN	BUBBLE	BUBBLE & LETTERING COLORS					
☐ Clear - No Letters	Clear - Red Letters						
☐ Bronze - No Letters	Clear - White Letters	☐ Black - White Letters					
Red - No Letters	Clear - Black Letters	Red - White Letters					
☐ Larsen-Loc®	White - Black Letters	Bronze - White Letters					
(Available with all door styles)	Other						

LARSEN'S MANUFACTURING COMPANY - www.larsensmfg.com

7421 Commerce Lane N.E., Mpls, MN 55432 Phone: (763) 571-1181 FAX: (763) 571-6900

FLORIDA DIVISION:

3130 N.W. 17th Street, Ft. Lauderdale, FL 33311 Phone: (954) 486-3325 FAX: (954) 486-3352

^{**} Deduct 3/4" from HxW dimensions for cabinets with aluminum trim. This does not apply to the "FS" fire-rated option.

^{***} Rough openings are larger for fire-rated cabinets.